

SOUTH POLARITY WARPED BY STEEL HOUSING TO FACE THE OTHER DIRECTION



SECTION A-A



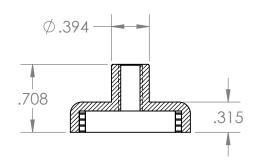

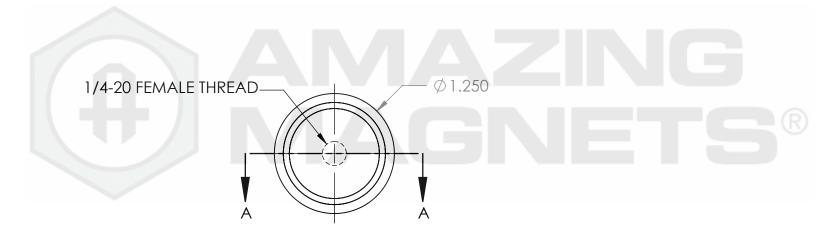

GRADE: N40	PROPRIETARY AND CONFIDENTIAL	UNLESS OTHERWISE SPECIFIED:	NAME		DATE		AMAZII		
MAGNETIZED: YES	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMAZING MAGNETS LLC ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AMAZING MAGNETS LLC IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/64 ANGULAR: MACH ± 1° TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005	DRAWN	LB	1/25/2012	V	MAGNE	ETS [®]	
RESIDUAL INDUCTION (Br): 12.5-12.8 KG			CHECKED	TB	1/25/2012	TITLE	CUPF1250		
COERCIVE FORCE (Hc): ≥ 11.4 KOe		MATERIAL:	COMMENTS: ALL EDGES BROKEN 0.025 MAX						
INTRINSIC COERCIVE FORCE (Hci): ≥ 12.0 KOe		NdFeB				SIZE	DWG. NO.	O REV	
MAX. ENERGY PRODUCT (BHmax): 38-41 MGOe	CAGE CODE	Ni-Cu-Ni (silver in Color)				A	CUPF1250-SPECS		
MAX OPERATIONAL TEMP: 80C / 176F	4R1R7	,				SCAI	SCALE 1:1		
<u></u>		DO NOT SCALE DRAWING				30/11			

4 3 2