




SECTION A-A

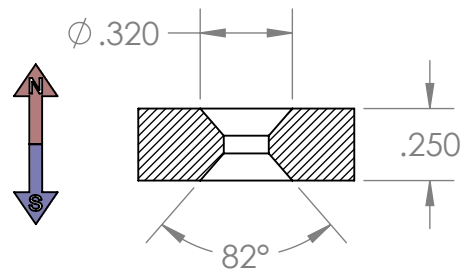

Ø.15625
THRUHOLE
COUNTERSUNK
BOTH SIDES

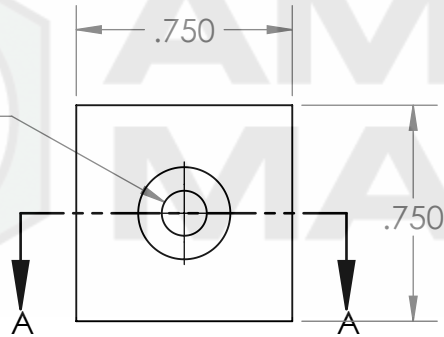

AMAZING
MAGNETS®

GRADE: N40
MAGNETIZED: YES
RESIDUAL INDUCTION (Br): 12.5-12.8 KG
COERCIVE FORCE (Hc): ≥ 11.4 KOe
INTRINSIC COERCIVE FORCE (Hci): ≥ 12.0 KOe
MAX. ENERGY PRODUCT (BHmax): 38-41 MGOe
MAX OPERATIONAL TEMP: 80C / 176F

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMAZING MAGNETS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AMAZING MAGNETS LLC IS PROHIBITED.
CAGE CODE 4R1R7

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/64 ANGULAR: MACH ± 1° TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005
MATERIAL: NdFeB
FINISH: Ni-Cu-Ni (silver in Color)
DO NOT SCALE DRAWING

NAME		DATE
DRAWN	LB	1/18/2012
CHECKED	TB	1/18/2012
COMMENTS:	ALL EDGES BROKEN 0.025 MAX	

**AMAZING
MAGNETS®**

TITLE: QH250F-F2

SIZE A	DWG. NO. QH250F-F2-SPECS	REV 0
SCALE 3 : 2		

5

4

3

2

1