

4



3

2

1

REVISIONS

| ZONE | REV. | DESCRIPTION | DATE | APPROVED |
|--------|------|-----------------|-----------|------------|
| SHEET1 | REVO | INITIAL RELEASE | 8/15/2019 | Spencer W. |

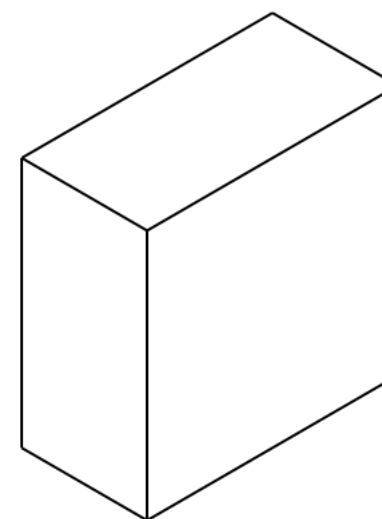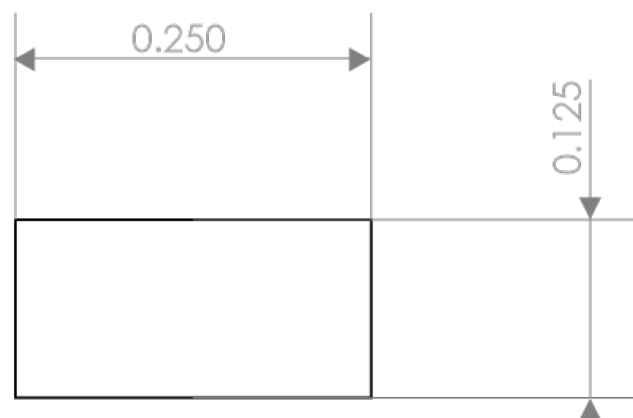

CONDITIONS

- PART IS TO BE FREE OF SCRATCHES, DENTS, AND DEFECTS CAUSED DURING PRODUCTION.
- PART IS TO BE FREE OF GREASE, AND DISCOLORATION ON ALL SURFACES.
- PARTS MUST BE PACKAGED IN A MANOR SUITABLE TO AVOID DAMAGE DURING TRANSPORT, STORAGE, AND HANDLING

MAGNETIC PROPERTIES

MATERIAL: LICENSED NdFeB
 GRADE: N52
 COATING: Nickel (Ni-Cu-Ni)
 MAGNETIZED: THICKNESS
 Br (KG): 14.3-14.8
 HcB (KOe): ≥10.0
 Hci (KOe): ≥11.0
 BHmax (MGOe): 50-53
 MAXIMUM TEMPERATURE: 70C / 158F

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMAZING MAGNETS LLC ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AMAZING MAGNETS LLC IS PROHIBITED.

CAGE CODE
4R1R7

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 ANGULAR: MACH ± 1°
 TWO PLACE DECIMAL ± 0.005"
 THREE PLACE DECIMAL ± 0.004"

DO NOT SCALE DRAWING

| NAME | DATE |
|--------------------|-----------|
| DRAWN Christi P. | 8/15/2019 |
| CHECKED Spencer W. | 8/15/2019 |

COMMENTS:



TITLE: **P250AB-N52**

| SIZE | DWG. NO. | REV |
|----------|------------------|----------|
| B | P250AB-N52-SPECS | 0 |

4

3

2

1

B

B

A

A