

4

3





2

1

## REVISIONS

ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	3/26/2019	SW

2X  $\phi$ .156 THRU  
 $\surd$   $\phi$ 0.320 X 82°

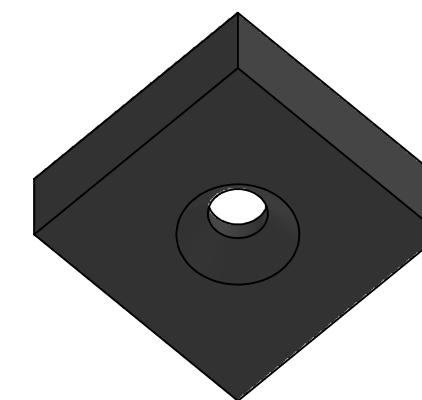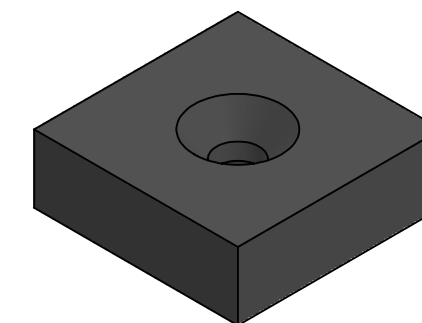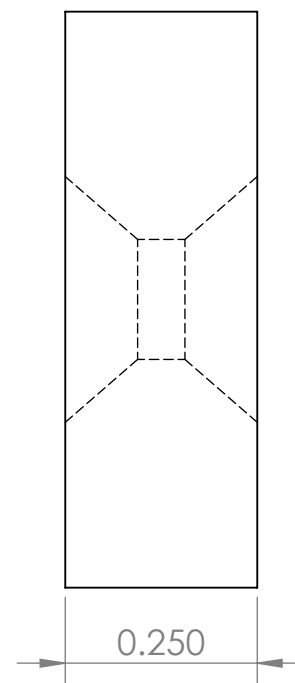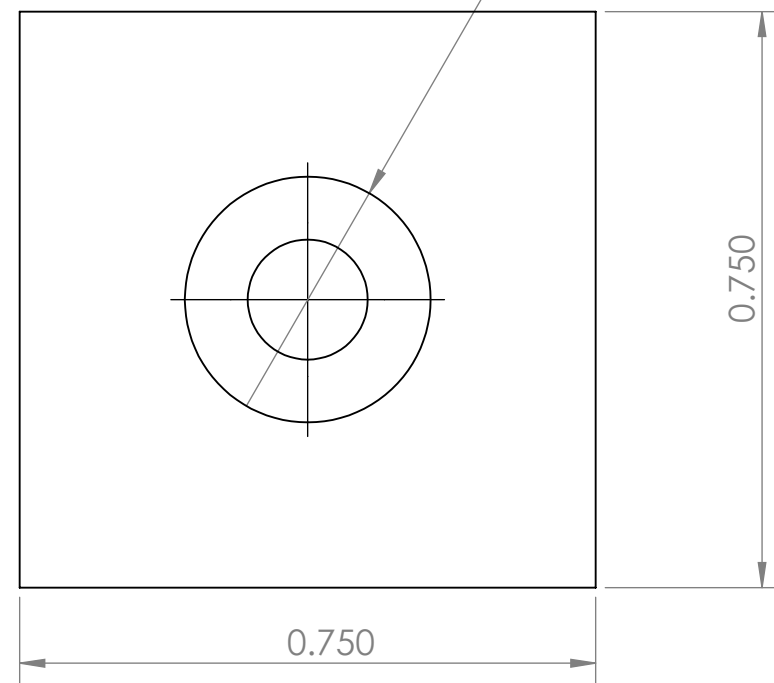

## CONDITIONS

- PART IS TO BE FREE OF SCRATCHES, DENTS, AND DEFECTS CAUSED DURING PRODUCTION.
- PART IS TO BE FREE OF GREASE, AND DISCOLORATION ON ALL SURFACES.

## MAGNETIC PROPERTIES

MATERIAL: NdFeB  
 GRADE: N40  
 COATING: BLACK EPOXY (Ni-Cu-Black Epoxy)  
 MAGNETIZED: YES  
 RESIDUAL INDUCTION (Br): 12.5-12.8 KG  
 COERCIVE FORCE (HcB):  $\geq 11.4$  KOe  
 INTRINSIC COERCIVE FORCE (Hci):  $\geq 12.0$  KOe  
 MAXIMUM ENERGY PRODUCT (Bhmax): 38-41 MGOe  
 MAXIMUM OPERATIONAL TEMPERATURE: 80C / 176F

## PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMAZING MAGNETS LLC ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AMAZING MAGNETS LLC IS PROHIBITED.

CAGE CODE  
**4R1R7**

## UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL  $\pm 1/64$   
 ANGULAR: MACH  $\pm 1^\circ$   
 TWO PLACE DECIMAL  $\pm 0.01$   
 THREE PLACE DECIMAL  $\pm 0.004$

DO NOT SCALE DRAWING

NAME	DATE
DRAWN CW	3/4/2019
CHECKED SW	3/4/2019

COMMENTS:  
 ALL EDGES BROKEN 0.025" MAX



TITLE: QH250F-F2-BE

SIZE	DWG. NO.	REV
<b>B</b>	QH250F-F2-BE-SPECS	<b>A</b>

4

3

2

1